


Japandi

www.cobsa.net/japandi




since 1976

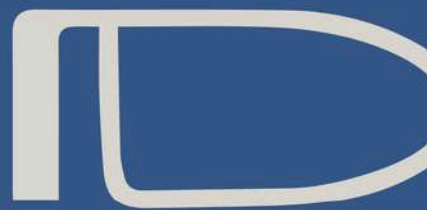

Japandi

16x16 cm-6,2x6,2 in / 16x14cm-6,2x5,4in / 9x9cm-3,6x3,6 in
5x15cm - 2x6in



-  Pasta Blanca - *White Body*
-  Satinado - *Satin / Metalico - Metallic*
-  Apariencia Uniforme - *Uniform Appearance*

Embalaje/Packing

Formato Size	Espesor Thickness	CAJA / BOX			PALET / PALLET			
		Piezas Pieces	Kg	m2	Cajas Boxes	Piezas Pieces	Kg	m2
16x16cm circulo	8 mm	16	4,50	0,32	145	2.320	668	46,63
14x16cm escama	8 mm	33	7,80	0,42	75	2.475	600	31,13
5,5x15cm picket	7 mm	76	5,58	0,43	102	7.752	585	43,86
9x9cm union	8 mm	56	4,40	0,34				



since 1976



since 1976

DESIGN

Japandi, WHITE



since 1976

DESIGN


Japandi, ROSEWOOD, VELVET ROSE



since 1976

ESSENCE

Japandi, SEAWEED, MOSS GREEN

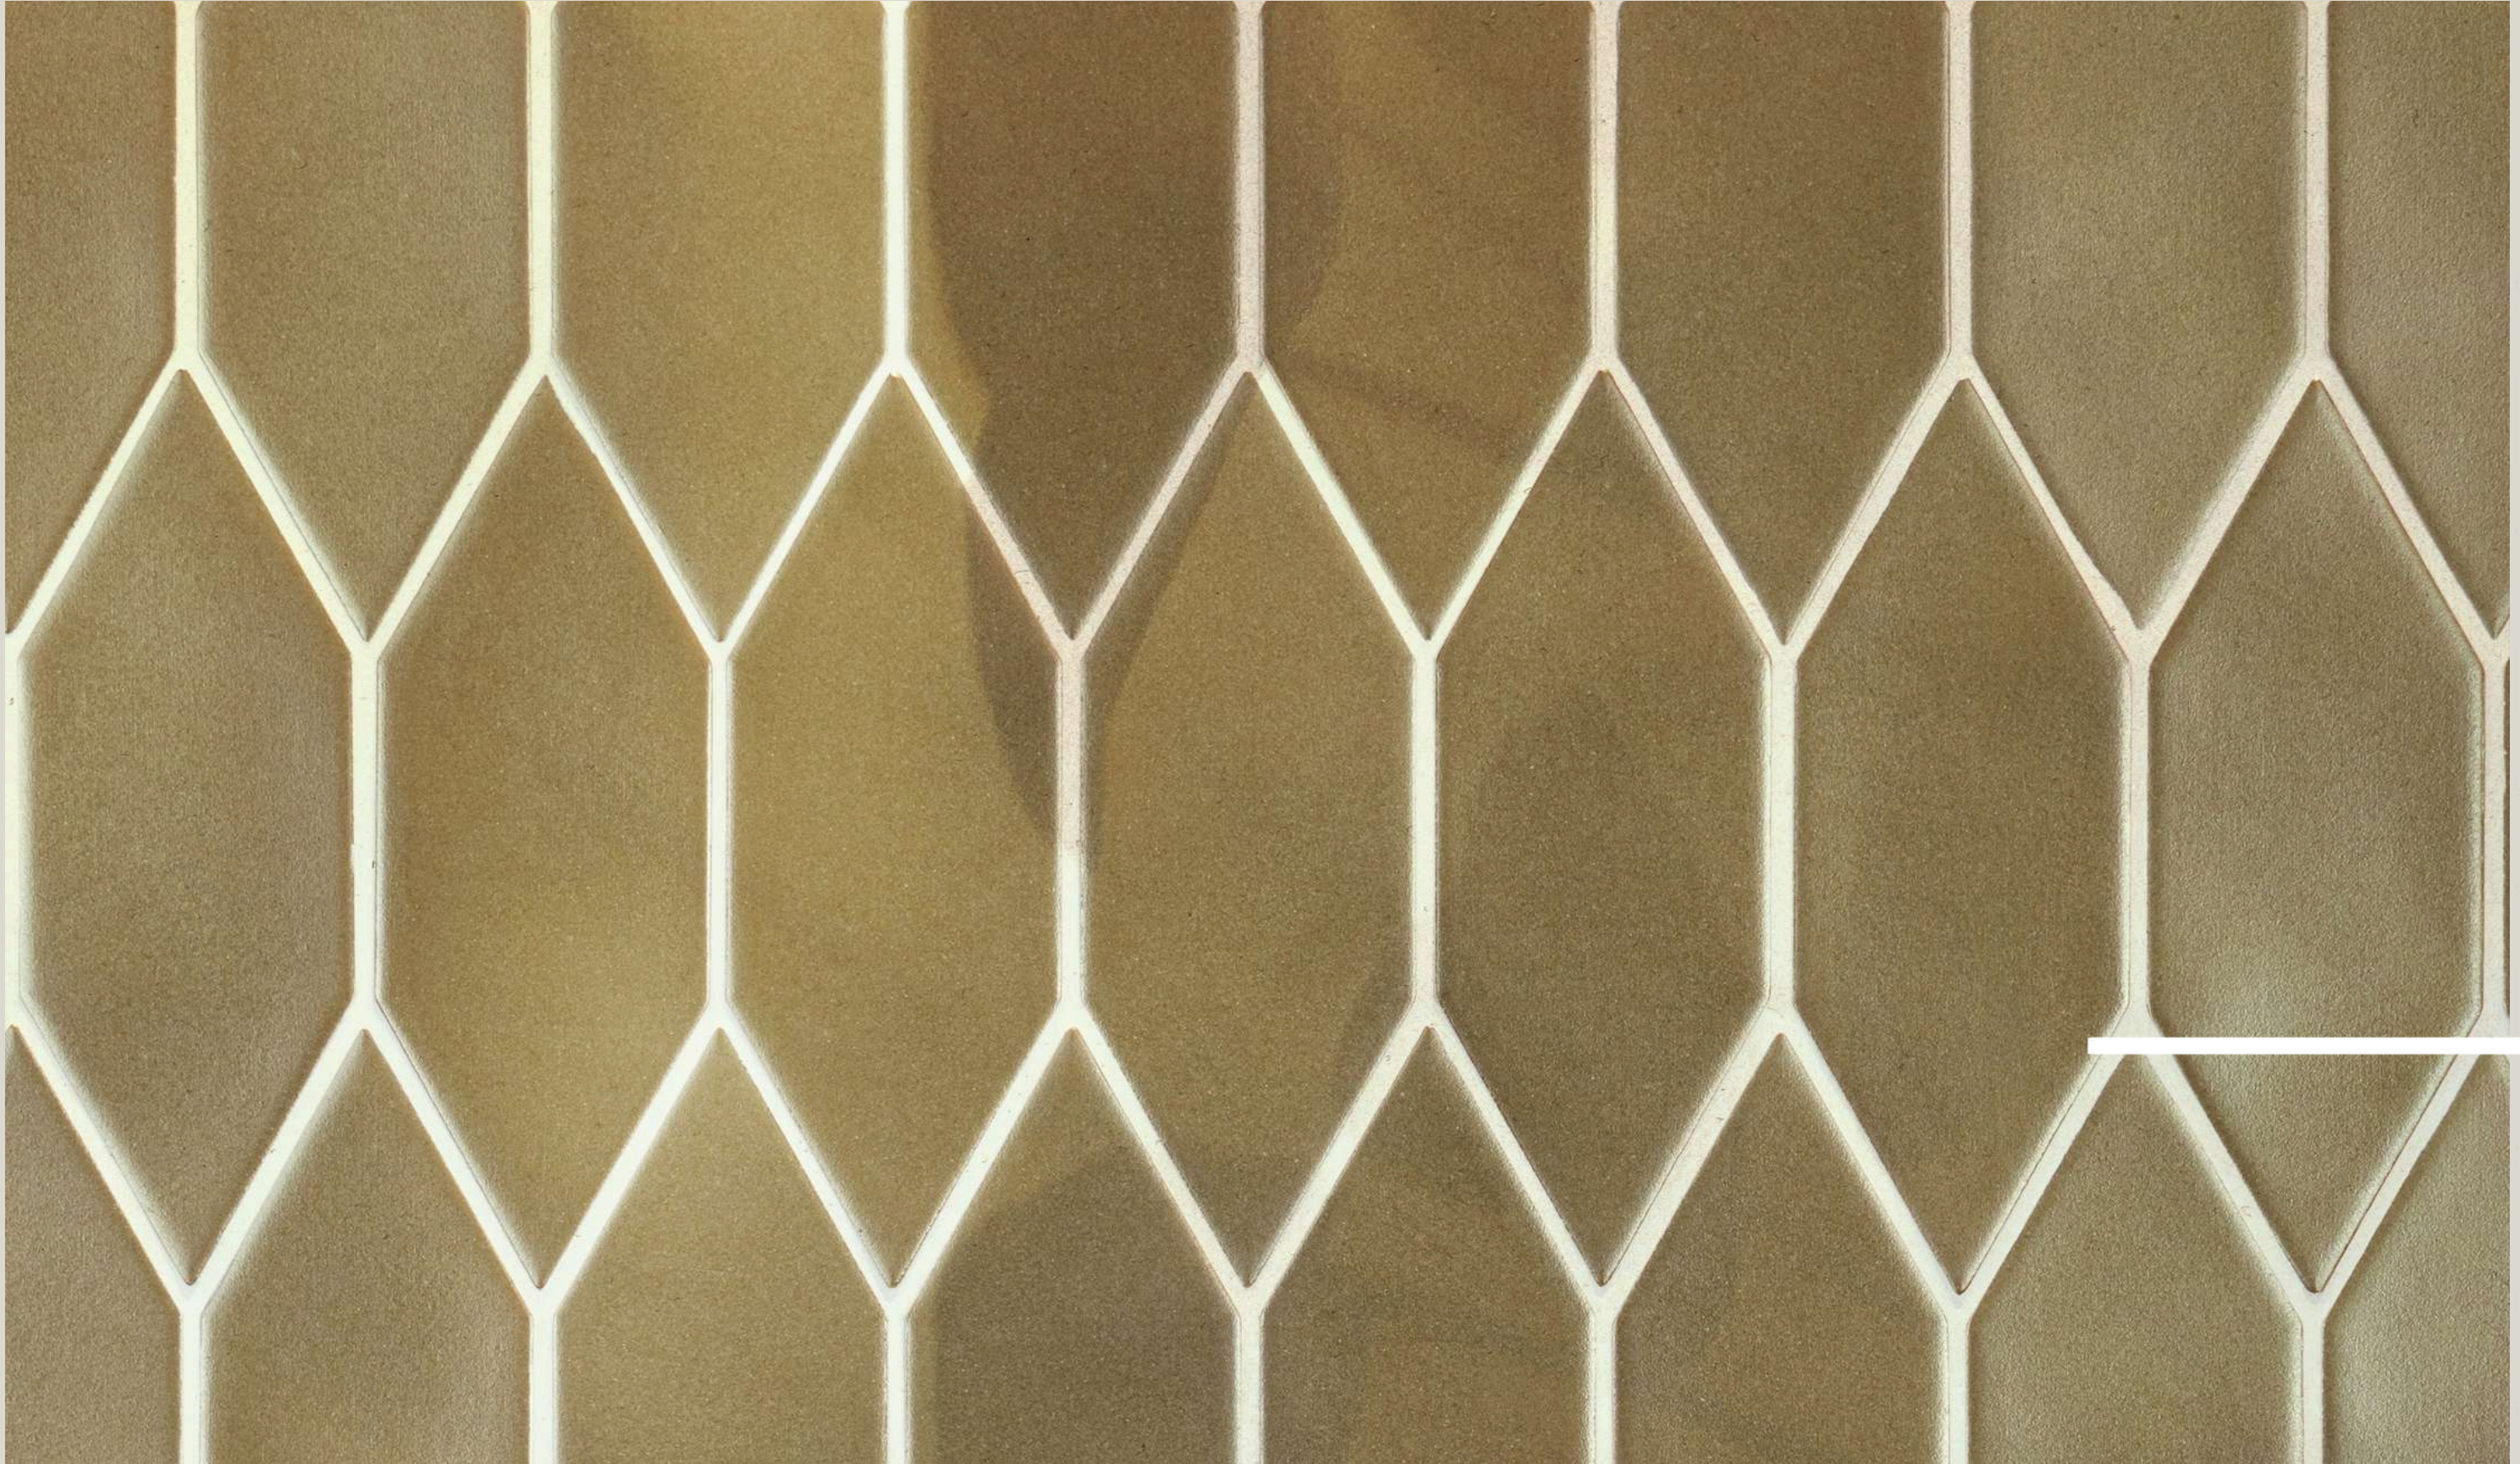

Japandi, SAVANNA

since 1976

ESSENCE

Japandi

RECOMENDACIONES / RECOMMENDATIONS

Colocación: Es necesario emplear un material de agarre y de rejuntado apropiado para cada producto

Hay que realizar un planteamiento inicial antes de empezar la colocación y tener en cuenta el tipo de junta, estructural, perimetral, dilatación y colocación que debe utilizarse para cada uso.

Aconsejamos que para obtener un resultado óptimo se debe utilizar una junta de 1,5 mm.

Tile Fixing: It is necessary to use an appropriate adhesive and grouting material for each product

An initial approach must be made before starting the installation and take into account the type of joint, structural, perimeter, expansion and installation that must be used for each use.

We advise that to obtain an optimal result a 1.5 mm joint should be used.

Mantenimiento y Limpieza: Una vez terminada la colocación se recomienda eliminar los restos de material adhesivo y rejuntado específico para cada material siguiendo las instrucciones del fabricante de estos productos.

En la limpieza general no debe de emplearse detergentes en polvo y estropajos agresivos. Es suficiente limpiar los azulejos con una esponja, agua tibia y un jabón líquido neutro. Finalmente aclarar con agua limpia.

Maintenance and Cleaning

Once the placement is finished: it is recommended to remove the remains of adhesive material and specific grouting for each material, following the manufacturer's instructions for these products.

In general, powder detergents and aggressive scouring pads should not be used for cleaning. It is enough to clean the tiles with a sponge, warm water and a neutral liquid soap. Finally, rinse with clean water.

SIZE: 16x16 cm-6,2x6,2 in / 16x14cm- 6,2x5,4in / 9x9cm-3,6x3,6 in 5x15cm - 2x6in	THICKNESS (mm): 9 mm	GROUP BIII: Wall Tile
Size, Thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements

Water absorption capacity	EN ISO 10545-03	> 10%
Flexion resistance	EN ISO 10545-04	≥ 10 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stand the test
Cracking resistance	EN ISO 10545-11	It stand the test

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 19545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5



COBSA FACTORY

Calle San Fernando 7,
12200 Onda, Castellón
Spain

Tel.: +34 964 57 78 78

a brand of

ALTOGLASS
GROUP

HEADQUARTERS

Pol. Ind. Casablanca s/n
12593 Moncofa, Castellón
Spain

Tel.: +34 964 57 78 78
alttogglass@alttogglass.com

USA BRANCH

1924 - 28 NW 82 Avenue
Doral FL. 33126
USA

Tel.: +1 305 - 718 8682
info.usa@alttogglass.com

www.cobsa.net/japandi

since 1976

